

# BIKE RACK SPACING REQUIREMENTS

## BICYCLE PARKING DESIGN STANDARDS TABLE

### Distance between Bicycle Racks


Aligned End-to-End:	Minimum 96" apart
Aligned Side-by-Side:	Minimum 96" apart

### Distance from Curb

Racks Perpendicular to Curb:	Minimum 36" from back of curb
Racks Parallel to Curb:	Minimum 24" from back of curb

### Distance from Wall

Racks Perpendicular to Wall:	Minimum 48" from wall
Racks Parallel to Wall:	Minimum 36" from wall

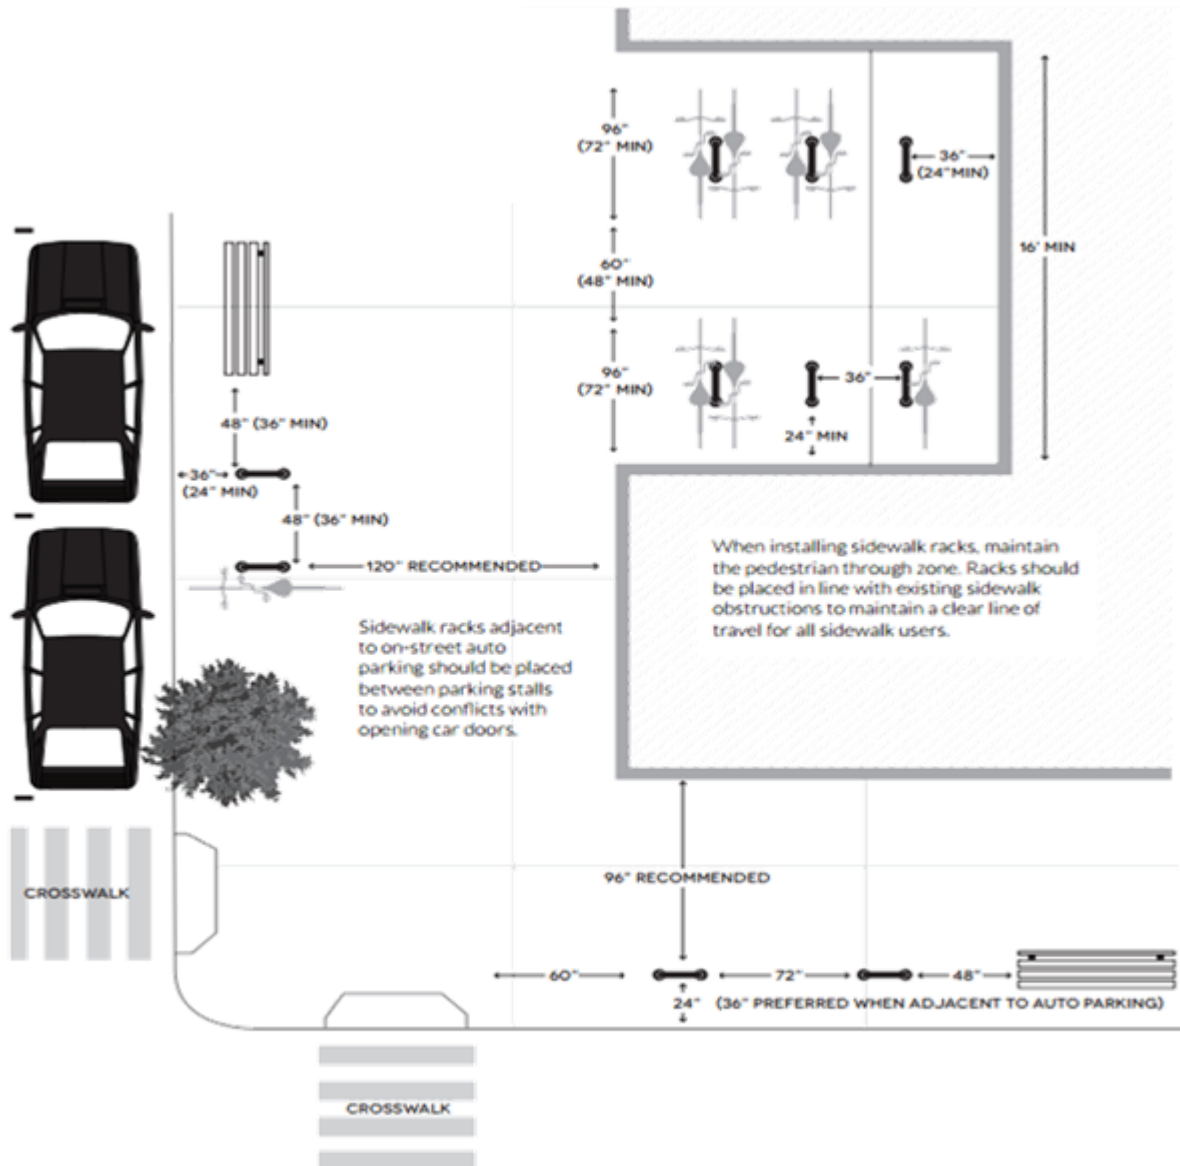

**Source:** Essentials of Bike Parking: Selecting and Installing Bicycle Parking that Works

© 2015 by Association of Pedestrian and Bicycle Professionals.

[http://c.ymcdn.com/sites/www.apbp.org/resource/resmgr/Bicycle\\_Parking/EssentialsofBikeParking\\_FINA.pdf](http://c.ymcdn.com/sites/www.apbp.org/resource/resmgr/Bicycle_Parking/EssentialsofBikeParking_FINA.pdf)